



# Quickstart guide SRT306

SRT3060210A14\_QG\_EN\_STD

**Turn on/off**

Move switch into on or off position



The personal alarm vibrates shortly and thereafter turns on/off.



**Sending an alarm**



Press the alarm button until the device vibrates.

The personal alarm vibrates as soon as the alarm has been sent.



**Acoustic warning**

If the SIM card is out of place the device will emit an audible signal. Shut the device off, extract and reinsert the SIM card and turn the device on again.

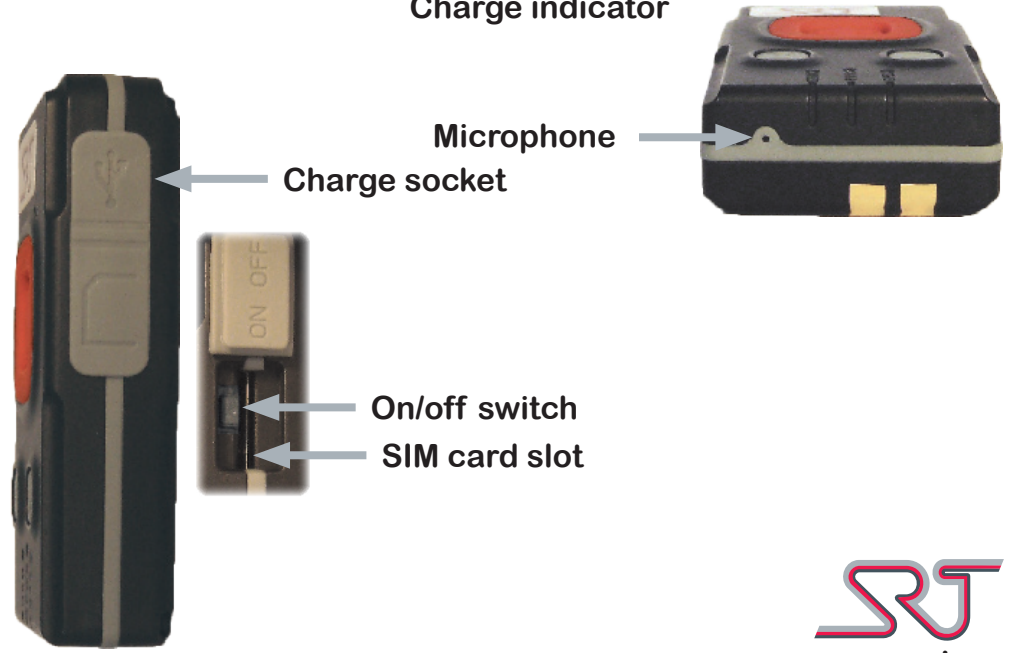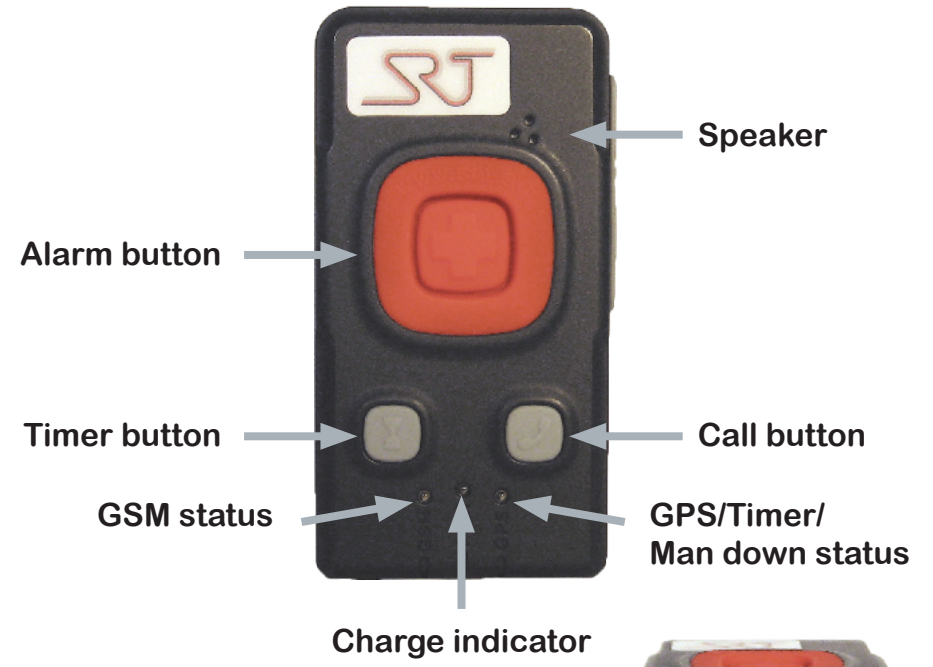

# Status LEDs

## GSM status LED

### Solid

Searching for a GSM network

### Slow blinking

Connected to a GSM network

### Rapid blinking

Voice call in progress

### No light

GSM is turned off

## GPS/Timer/ Man down status

### Blinking (green)

The device have a current GPS position.

### No light

GPS is either turned off, is in idle mode or have no current position.

Man down is disabled.

### Blinking (red)

Timer alarm/Man down is enabled.

### Blinking (red/green)

the device have a current GPS position.

Timer alarm/Man down is enabled.

## Charge indicator LED

(no charger connected)

**Blinking three times every 15 seconds**

The device is on and shows the battery status with three blinks

Very good

● green ● green ● green

Good

● green ● green ● red

Low

● green ● red ● red

Critical

● red ● red ● red

**Alternating between solid red and green**

The device is shutting down

## Charge indicator LED

(charger connected)

**Blinking green every other second**

The device is on and charging

**Blinking red every other second**

The device is off and charging

**Solid green**

The device is on and fully charged

**Solid red**

The device is off and fully charged

**Alternating between solid red and green**

The device is shutting down

## Charging

**(Desktop charger)**

Place the unit in the desktop charger

**Charging (USB)**

Lift the rubber flap on the side of the device

Insert the charger cable into the mini USB connector.

The charge indicator LED will blink **red** or **green** when charging

The charge indicator LED will turn into a solid **red** or **green** when the device is fully charged

## Charging times

Before using your alarm device the first time or whenever it is fully discharged, the battery should be charged for 4 hours. The device should be charged every day.